

CHRISTOPHER P. ISAAC
202. 408.4083
chris.isaac@finnegan.com

December 27, 2001

ATTORNEY DOCKET NO. 8350.1653-00
CUSTOMER NO. 22,852



Box PATENT APPLICATION
Assistant Commissioner for Patents
Washington, DC 20231

New U.S. Patent Application
Title: ELEMENT ROUTING METHOD AND APPARATUS
Inventors: Sammy J. GRAHAM, Gerard K. MOEHN
and Hong CHEN

Sir:

We enclose the following papers for filing in the United States Patent and Trademark Office in connection with the above patent application.

1. Specification - 9 pages; Claims - 6 pages, including 5 independent claims and 22 claims total; Abstract - 1 page.
2. Drawings - 2 sheets of drawings (Figures 1-2).
3. Declaration and Power of Attorney (2 pages).
4. Recordation Form Cover Sheet and Assignment to Caterpillar Inc. (4 pages)

Assistant Commissioner for Patents
December 27, 2001
Page 2

5. The filing fee is calculated as follows:

Basic Application Filing Fee					\$740	\$ \$740.00
	Number of Claims		Basic	Extra Claims		
Total Claims	22	-	20	2	x \$18	36.00
Independent Claims	5	-	3	2	x \$84	168.00
<input type="checkbox"/> Presentation of Multiple Dep. Claim(s)					+\$280	\$944.00
Subtotal						\$ \$944.00
Reduction by 1/2 if small entity						-
TOTAL APPLICATION FILING FEE						\$ \$944.00

6. The Commissioner is hereby authorized to charge \$984.00 to Caterpillar Deposit Account No. 03-1129. The fees includes:

\$740.00 filing fee;
\$204.00 fee for additional claims; and
\$40.00 Assignment recordation fee.

Please address all correspondence with respect to this application to:

Finnegan, Henderson, Farabow,
Garrett & Dunner, L.L.P.
1300 I Street, N.W.
Washington, D.C. 20005-3315

Please accord this application an application number and filing date and record and return the Assignment to the undersigned.

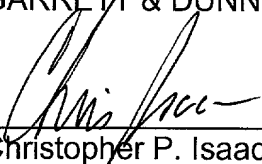
Assistant Commissioner for Patents
December 27, 2001
Page 3

The Commissioner is hereby authorized to charge any additional filing fees due and any other fees due under 37 C.F.R. § 1.16 or §1.17 during the pendency of this application to Caterpillar Deposit Account No. 03-1129.

Respectfully submitted,

FINNEGAN, HENDERSON, FARABOW,
GARRETT & DUNNER, L.L.P.

By: _____


Christopher P. Isaac
Reg. No. 32,616

CPI/chw
Enclosures

Description

ELEMENT ROUTING METHOD AND APPARATUS

Technical Field

- [01] The present invention relates generally to connecting components and, more particularly, to systems and methods for designing wire or cable harnesses.

Background

- [02] Wire harnesses are pre-formed groupings of two or more wires routed through a structure or element. Harnesses, or other routing elements, may be used to ensure that electronic components in a machine, such as electronic control modules (ECMs) or sensors, are properly connected. The wires, or connections, used to connect the components may be of different lengths and each wire may have a different starting or ending area within the machine. In addition to the advantage that the harnesses provide for proper connections, the harnesses may also be made remotely and then added to the machine at a later point in production.
- [03] Simple harnesses may route the wires through the structure in parallel fashion. More complex harnesses, however, may route the wires in a more efficient manner. For example, harnesses may be designed to minimize the number of wire splices or bundles. Harness designs may need to conform to a certain set of guidelines. For example, in most applications, the size of the completed harness must fit within a certain allotted space. Additionally, there are design guidelines and standards to be followed. There may be machine-dependent standards, for example, relating to the proximity of wires to a heat source or the proximity of wires to an edge of a machine. There may also be

component-dependent standards, such as limits on the bend radius associated with each wire or the number of clips. Inefficient harness routing may cause unnecessary lengths of the routing element. Further, incorrect harness routing may cause short and/or long term damage to the routing element.

[04] Currently, much of the harness design process is done by an individual. For example, the individual may develop the harness design manually, either by manually drawing the element or manually entering the design into an electronic wiring package. In either case, the actual substance of the design process, such as the guidelines followed and the efficiencies chosen, is borne by the individual designer. One disadvantage of this process is that there is little uniformity among harnesses developed by different individuals. Further, harness designs may be inefficient. Poor designs may lead to problems with the connecting elements. Additionally, the guidelines for the individual to follow are often not centrally located. Therefore, any applicable guideline may not be followed in every harness design. Furthermore, the process is repetitive and changes in the machine often require the process to be repeated from the beginning. For example, if the shape or footprint of the machine in which the harness will be used is changed, the harness must be entirely redesigned.

[05] The present invention is directed to overcoming one or more of the problems or disadvantages associated with the prior art.

Summary of the Invention

[06] A method is provided for designing a system including an element, wherein the element connects a plurality of components. First, a system design including the plurality of components is established. A diagram associated with the system design is generated, the wiring diagram including the element and the plurality of components. Guidelines for designing the structure are established. A routing pattern in the system for the element is then determined automatically based on the diagram and the guidelines. Another aspect of the present invention includes providing a computer-readable medium

including instructions for performing the above-described method. Yet another aspect of the present invention includes providing a system, including a routing design module configured to perform the above-described method.

[07] Further, a system is provided for designing a system including an element, wherein the element connects a plurality of components. The system includes a processor and a memory. The memory includes a computer-aided design module for establishing a system design and generating a diagram associated with the system design, one or more guidelines for designing the system, and a routing design module for automatically determining routing patterns in the structure for the element based on the diagram and the guidelines.

[08] A method is further provided for routing an element among a plurality of components. The plurality of components to be connected are established. The routing guidelines are established. The routing of the element to connect the plurality of components is automatically determined based on the routing guidelines.

[09] It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory only and are not restrictive of the invention as claimed.

Brief Description of the Drawings

[10] The accompanying drawings, which are incorporated in and constitute a part of this specification, illustrate an exemplary embodiment of the invention and together with the description, serve to explain the principles of the invention. In the drawings:

[11] FIG. 1 is a block diagram of routing design system consistent with an exemplary embodiment of the present invention; and

[12] FIG. 2 is a flow chart of an exemplary embodiment of a method, consistent with the present invention, for designing a routing element.

Detailed Description

- [13] Reference will now be made in detail to embodiments of the invention, examples of which are illustrated in the accompanying drawings. Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts.
- [14] The present invention provides a routing design system configured to determine the routing of one or more elements among two or more components. Components may include, for example, electronic control modules (ECMs) or sensors. Elements may include, for example, a wire or a harness including one or more wires. For example, the system may include two components connected by a wire. Alternatively, the system may include many components connected by a plurality of wires, wherein the wires may be bundled in a harness.
- [15] Figure 1 illustrates an exemplary routing design system 100 consistent with the present invention. Routing design system 100 may include a computer 105. Computer 105 may include a processor 110, a memory 120, an output module 130, and an input module 140. Processor 110 may perform various aspects of harness or other routing design, based on instructions stored in memory 120. Further, processor 110 may provide completed harness or routing designs or design information, such as a bill of materials associated with the harness to output module 130. Processor 110 may also receive information from input module 140 for use while designing the harness.
- [16] Memory 120 may include a computer-aided design (CAD) module 122, a routing design module 124, and guidelines 126. CAD module 122 may include instructions used by processor 110 for establishing a system or machine design or creating a wiring diagram based on the system design. Although the term wiring diagram and wires are used throughout, it should be understood that a wire broadly means any element used for connecting one component to another, and a wiring diagram is a diagram illustrating the connections made between the

components and the elements. In one exemplary embodiment, CAD module 122 may be implemented using a schematic entry tool, such as Pro-Engineer software. Routing design module 124 may include instructions used by processor 110 for designing a harness based on the wiring diagram and guidelines 126. Guidelines 126 may include system-dependent guidelines, such as the shape or footprint of the machine or proximity of wires to heat sources or machine edges. Guidelines 126 may also include element-dependent guidelines, such as wire bend radius limits. Guidelines 126 may also include component-dependent guidelines, such as, for example, the number of connections available on a particular component. Routing design module 124 may be implemented using software designed to interact with CAD module 122. Alternatively, CAD module 122 and routing design module 124 may be part of the same software package. Guidelines 126 may be stored locally on computer 105 or alternatively, may be accessible from a server or other computer (not shown) over a network, such as a local area network (LAN) or the Internet.

- [17] Output module 130 may receive harness designs or harness information from processor 110 to be printed or displayed. Output module 130, for example, may print or display three-dimensional models of the harness or two-dimensional flattened drawings of the harness, or may print or display harness information, such as data tables, parts list, or a bill of materials for the harness. The two-dimensional flattened drawing of the harness or routing element may include a view including straightened wires, which permit identification of the respective lengths of various wires or other elements or connections. Output module 130 may be connected to a display device, such as a monitor, or a printer. Alternatively, output module 130 may be connected to a storage device, such as a disk drive, for transferring the drawings and/or data to a storage medium, or to a network, such as a LAN or the Internet, for transferring the drawing and/or data to another computer or server.

- [18] Input module 140 may receive instructions from an operator for the design of a harness or other routing element. For example, input module 140 may receive information for establishing the system design or associated routing diagram. Input module 140 may receive inputs from a keyboard or other data-entry device, a storage medium reader, such as a CD-ROM drive, or via a network, such as a LAN or the Internet.
- [19] Computer 105 may be implemented in various environments to provide tools for designing a harness. Computer 105 may include hardware specifically constructed for performing various processes and operations of the invention or may include a general purpose computer or computing platform selectively activated or reconfigured by program code to provide the necessary functionality.
- [20] Fig. 2 illustrates an exemplary flow chart of a method for designing a routing element, instructions for which may be included in routing design module 124 and/or CAD module 122 to be performed by processor 110. First, a system design is established (step 200). In one exemplary embodiment, the routing element may be a harness; however, the methods and systems described herein are equally applicable to any element that may be used for routing connections between components. The system design may include a set of basic components that need to be connected, as well the basic topography of the system. For example, a system design may include a list of components, such as ECM1, ECM2, and sensor1, and their general connections, such as ECM1 to sensor1 and ECM1 to ECM2. The system design may be established using CAD module 122. Alternatively, a pre-established system design may be provided to harness design system 100 via input module 140.
- [21] Based on the system design, a wiring diagram is generated (step 210). The wiring diagram indicates how the components are to be connected together by the elements. The wiring diagram may include a flat or two-dimensional, point-to-point drawing of the system. The wiring diagram may not

be to scale. Further the wiring diagram may not take into account the geometry or footprint of the system. The wiring diagram may be generated manually or automatically. For example, given a connection table that lists what points in the system need to be connected, CAD module 122 may automatically generate a wiring diagram based on the table.

- [22] Next, guidelines are established (step 220). Guidelines provide general recommendations, rules, and/or standards for designing the harness. In one exemplary embodiment, guidelines may include recommendations for the routing of one or more elements through the routing design. Guidelines may be created by prompting the user to answer one or more questions. Alternatively, guidelines may be accessed via a storage medium reader. In one exemplary embodiment, guidelines 126 are stored in memory 120. In another embodiment, guidelines are stored at a centralized location, such as a server (not shown), and are accessed during the process of harness design. In this embodiment, use of uniform guidelines may be ensured. Further, in this embodiment, updating of guidelines is a simpler process since all guidelines are stored in one location. Guidelines may include machine dependent guidelines, such as the geometry or footprint of the machine and locations of heat sources or edges. Guidelines may also include element-dependent guidelines, such as the wire bend radius limits and allowable proximity of wires or components to heat sources or edges. Further, guidelines may include component-dependent guidelines, such as the number of connections permitted on a particular component.

- [23] A harness is then designed based on the wiring diagram and the guidelines (step 230). The harness may include one or more wires, or may include one or more bundles, each including one or more wires. Routing design module 124 may automatically determine which wires are to be included in each bundle. Routing design module 124 may also determine the packing, or layout, of the bundles within the harness structure. In one embodiment, routing design module 124 may consider the bundles to be packed beginning with a bundle that

is attached to a connector or entry port of the harness structure. Once it places that bundle, routing design module 124 may consider adjacent bundles for placement.

Industrial Applicability

[24] Systems and methods are thus provided to streamline the harness design process. By using consistent guidelines as a basis for automated design, it is possible to improve uniformity because the guidelines may be automatically applied. As used in throughout this description, automatically means without an operator performing the task. Tasks performed automatically, however, may require an input from an operator in order for the task to begin. Further, automatically does not necessarily mean occurring immediately.

[25] Further, systems and methods of the present invention provide for a streamlined process and eliminate costly redundant work at revisions. For example, in one exemplary embodiment, any change or update made with respect to the guidelines results in an automatic update to a harness design. For example, if during the process the geometry or footprint of the machine is altered or the space allocated for the harness structure is changed, routing design module 124 may automatically make appropriate corrections to an existing harness design, thus making revisions much more efficient.

[26] Systems and methods of the present invention also provide for a streamlined process in that results of the harness design process can be used for various aspects in actually preparing the physical harness. For example, the results of the harness design process may be used to automatically determine a parts list. In one embodiment, the system may automatically recommend components needed for the routing structure, as well as other components, such as clips, connectors, or fittings. Based on this list of recommended components, the system may generate a bill of material or other list to assist in cost determination. For example, a supplier may be able to provide more effective price quotations given a bill of materials or a list of cost drivers, such as the

number of splices, the number of bundles, or other factors. The bill of material may also be given to the supplier with increased confidence of accuracy.

[27] It should be understood that systems and methods consistent with the present invention are applicable for fields other than conventional wiring diagrams. In particular, any field that benefits from intelligent routing based on one or more guidelines or standards may provide a potential uses for the present invention.

[28] It will be readily apparent to those skilled in this art that various changes and modifications of an obvious nature may be made, and all such changes and modifications are considered to fall within the scope of the appended claims. Other embodiments of the invention will be apparent to those skilled in the art from consideration of the specification and practice of the invention disclosed herein. It is intended that the specification and examples be considered as exemplary only, with a true scope and spirit of the invention being indicated by the following claims and their equivalents.

Claims

What is claimed is:

1. A method of designing a system including an element, wherein the element connects a plurality of components, the method comprising:
establishing a system design including the plurality of components;
generating a diagram associated with the system design, wherein the wiring diagram includes the element and the plurality of components;
establishing guidelines for designing the system; and
automatically determining a routing pattern in the system for the element based on the wiring and the guidelines.
2. The method of claim 1, wherein the element includes one or more connections, the step of determining a routing pattern includes the steps of:
determining one or more sets of one or more connections that can be bundled; and
determining a routing pattern in the element for each bundle.
3. The method of claim 1, further including the steps of:
receiving one or more revised guidelines for designing the structure; and
determining a revised routing pattern in the system for the element based on the diagram and the revised guidelines.
4. The method of claim 1, further including:

providing a drawing illustrating the structure and the determined routing patterns.

5. The method of claim 1, wherein the step of accessing guidelines for designing the structure includes the step of:
accessing guidelines associated with the system design.

6. The method of claim 1, wherein the step of accessing guidelines for designing the structure includes the step of:
accessing guidelines associated with the plurality of components and/or the element.

7. The method of claim 1, further including the step of:
automatically providing information about the designed system.

8. The method of claim 7, wherein the step of automatically providing information includes the step of:
providing at least one of: a three-dimensional drawing of the structure; a two-dimensional drawing of the structure; a list of elements and components; and a bill of material associated with at least one of the system, the element, and the components.

9. The method of claim 1, wherein the element includes a harness.

10. A computer-readable medium including instructions for designing a structure for routing a plurality of elements for connecting components, comprising the steps of:

establishing a system design including a plurality of components;
generating a wiring diagram associated with the system design,
wherein the wiring diagram includes the plurality of elements and the plurality of components;
accessing guidelines for designing the structure; and
automatically determining routing patterns in the structure for the plurality of elements based on the wiring diagram and the guidelines.

11. The computer-readable medium of claim 10, wherein the step of determining routing patterns includes the steps of:

determining one or more sets of one or more elements that can be bundled; and
determining a routing pattern in the structure for each bundle.

12. The computer-readable medium of claim 10, further including the steps of:

receiving one or more revised guidelines for designing the structure; and
determining a revised routing pattern in the structure for the plurality of elements based on the wiring diagram and the revised guidelines.

13. The computer-readable medium of claim 10, further including:

providing a schematic illustrating the structure and the determined routing patterns.

14. The computer-readable medium of claim 10, wherein the step of accessing guidelines for designing the structure includes the step of:
accessing standards associated with the system design.

15. The computer-readable medium of claim 10, wherein the step of accessing guidelines for designing the structure includes the step of:
accessing standards associated with the plurality of elements.

16. The computer-readable medium of claim 10, further including the step of:
automatically providing information about the designed structure.

17. The computer-readable medium of claim 10, wherein the step of automatically providing information includes the step of:
providing at least one of: a three-dimensional drawing of the structure; a two-dimensional drawing of the structure; a list of elements and components; and a bill of material.

18. The computer-readable medium of claim 10, wherein the structure includes a harness and the elements include wires.

19. A system for designing a system including an element, wherein the element connects a plurality of components, the system comprising:
a processor; and
a memory, wherein the memory includes

a computer-aided design module for establishing a system design and generating a diagram associated with the system design, wherein the diagram includes the element and the plurality of components;

one or more guidelines for designing the system; and

a routing design module for automatically determining routing patterns in the structure for the element based on the diagram and the guidelines.

20. The system of claim 19, wherein the routing design module is software designed to work with the computer-aided design module.

21. A system for designing a system including an element, wherein the element connects a plurality of components, the system comprising:
a routing design module configured to perform the following steps,

establishing a system design including the plurality of components;

generating a diagram associated with the system design, wherein the wiring diagram includes the element and the plurality of components;

establishing guidelines for designing the system; and

automatically determining a routing pattern in the system for the element based on the wiring and the guidelines.

22. A method of routing an element among a plurality of components, the method comprising:

establishing the plurality of components to be connected;

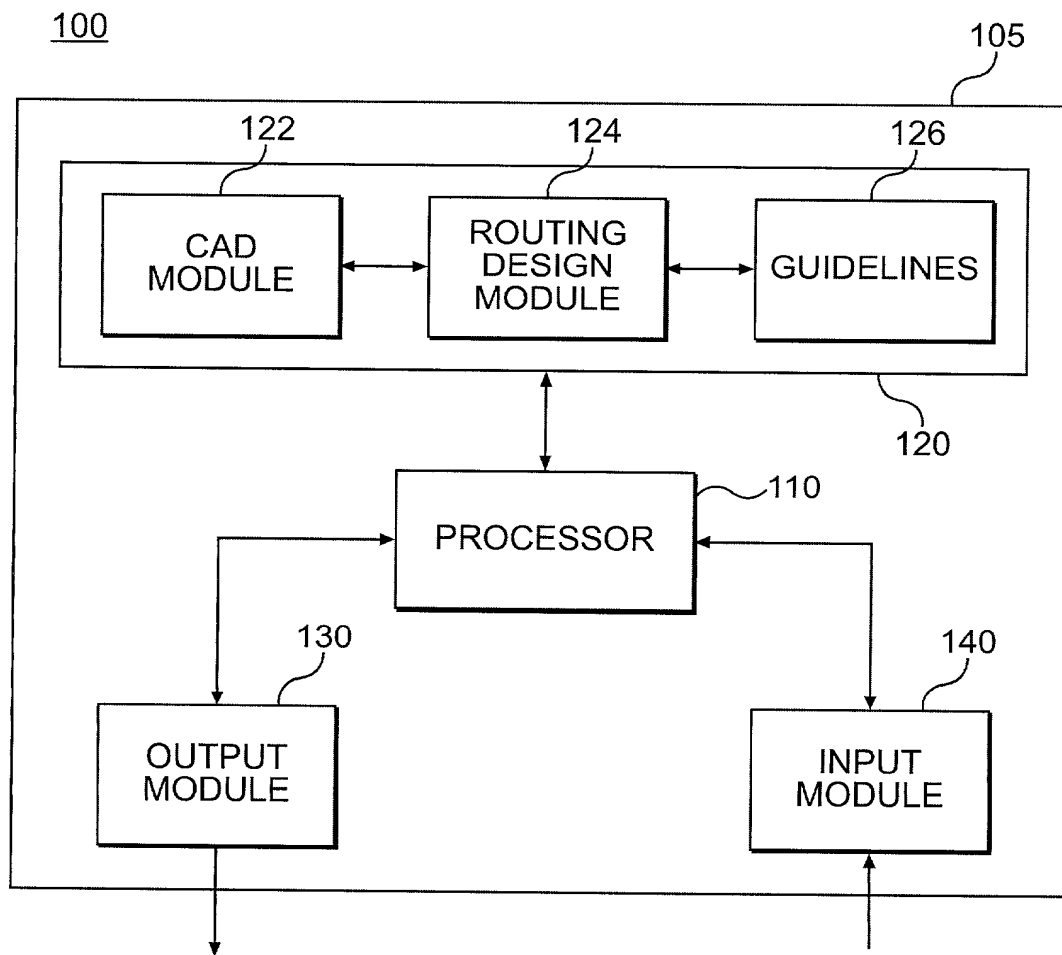
establishing routing guidelines; and

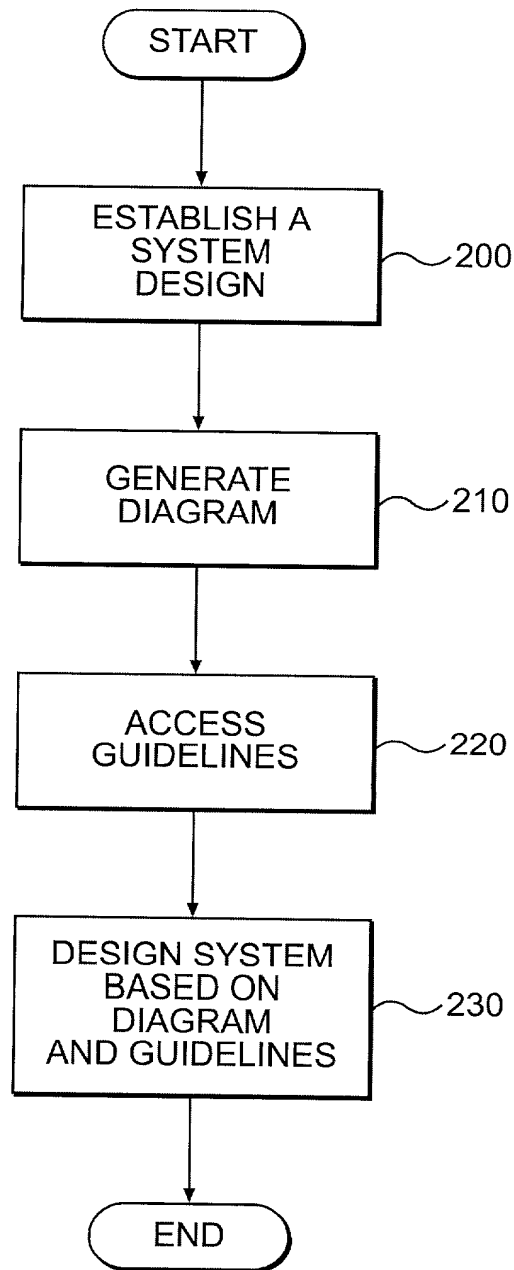
automatically determining a routing of the element to connect the plurality of components based on the routing guidelines.

Abstract of the Disclosure

ELEMENT ROUTING METHOD AND APPARATUS

A method is provided for designing a system including an element, wherein the element connects a plurality of components. First, a system design including the plurality of components is established. A diagram associated with the system design is generated, the wiring diagram including the element and the plurality of components. Guidelines for designing the structure are established. A routing pattern in the system for the element is then determined automatically based on the diagram and the guidelines.

**FIG. 1**

**FIG. 2**

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; I believe I am the original, first, and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: ELEMENT ROUTING METHOD AND APPARATUS, the specification of which ☒ is attached and/or ☐ was filed on [Date] as United States Application Serial No. [Text] or PCT International Application No. [Text] and was amended on [Text] (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate or § 365(a) of any PCT international application(s) designating at least one country other than the United States, listed below and have also identified below, any foreign application(s) for patent or inventor's certificate, or any PCT International application(s) having a filing date before that of the application(s) of which priority is claimed:

Country	Application Number	Date of Filing	Priority Claimed Under 35 U.S.C. 119
[Text]	[Text]	[Date]	<input type="checkbox"/> YES <input type="checkbox"/> NO

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below:



Application Number	Date of Filing
[Text]	[Date]

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s) or § 365(c) of any PCT International application(s) designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application(s) in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application(s) and the national or PCT International filing date of this application:

Application Number	Date of Filing	Status (Patented, Pending, Abandoned)
[Text]	[Text]	[Text]

I hereby appoint the following attorney and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. **FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L.L.P., CUSTOMER NUMBER 22,852**, David W. Hill, Reg. No. 28,220; Christopher P. Isaac, Reg. No. 32,616; R. Bruce Bower, Reg. No. 37,099; Anthony M. Gutowski, Reg. No. 38,742; Timothy M. Hsieh, Reg. No. 42,672; Kurt A. Luther, Reg. No. 43,764; Kristen Osenga, Reg. No. 45,811; Erik R. Puknys, Reg. No. 40,132; Leonard Smith, Jr., Reg. No. 45,118; Jay A. Stelacone, Reg. No. 42,168; Jeanne M. Tanner, Reg. No. 45,156; and Douglas S. Weinstein, Reg. No. 43,249, all of Finnegan, Henderson, Farabow, Garrett & Dunner, L.L.P. and **CATERPILLAR INC.**, J. Wesley Blumenshine, Reg. No. 32,399; Joseph W. Keen, Reg. No. 28,432; Dennis C. Skarvan, Reg. No. 35,360; and W. Bryan McPherson, Reg. No. 41,988, all of Caterpillar Inc., 100 N.E. Adams Street, Peoria, IL 61629-6490. Please address all correspondence to **FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L.L.P.** 1300 I Street, N.W., Washington, D.C. 20005, Telephone No. (202) 408-4000.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Full Name of First Inventor Sammy J. Graham	Inventor's Signature 	Date 12/19/01
Residence 212 Madissyn Ct., East Peoria, IL 61611		Citizenship [Text] USA
Post Office Address same as above		
Full Name of Second Inventor Gerard K. Moehn	Inventor's Signature 	Date 12/19/01
Residence 1712 W. Blue Spruce Ct., Dunlap, IL 61525		Citizenship [Text] USA
Post Office Address same as above		

Attorney Docket No. [Text]

Full Name of Third Inventor Hong Chen	Inventor's Signature <i>Hong Chen</i>	Date 12/19/01
Residence 2307 W. Annamere Dr., Dunlap, IL 61525		Citizenship USA
Post Office Address same as above		

Year	1900	1901	1902	1903	1904	1905	1906	1907	1908	1909	1910	1911	1912	1913	1914	1915	1916	1917	1918	1919	1920	1921	1922	1923	1924	1925	1926	1927	1928	1929	1930	1931	1932	1933	1934	1935	1936	1937	1938	1939	1940	1941	1942	1943	1944	1945	1946	1947	1948	1949	1950	1951	1952	1953	1954	1955	1956	1957	1958	1959	1960	1961	1962	1963	1964	1965	1966	1967	1968	1969	1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100
1900	1901	1902	1903	1904	1905	1906	1907	1908	1909	1910	1911	1912	1913	1914	1915	1916	1917	1918	1919	1920	1921	1922	1923	1924	1925	1926	1927	1928	1929	1930	1931	1932	1933	1934	1935	1936	1937	1938	1939	1940	1941	1942	1943	1944	1945	1946	1947	1948	1949	1950	1951	1952	1953	1954	1955	1956	1957	1958	1959	1960	1961	1962	1963	1964	1965	1966	1967	1968	1969	1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	

April 2001

FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L.L.P.